


Uponor RS adapter female thread Rp1/2"FT-RS2

1059403

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

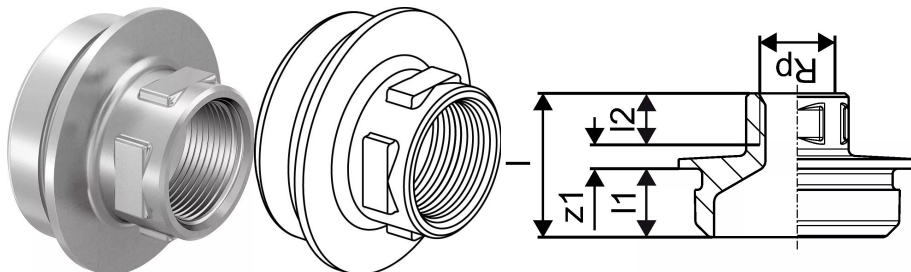

Application information Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor RS adapter female thread Rp1/2"FT-RS2

1059403

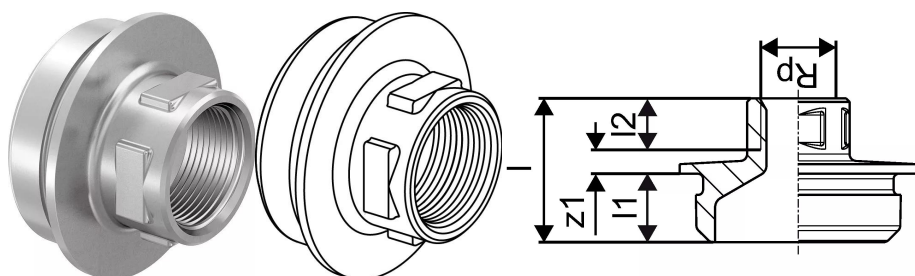**Measurements**

Female thread Rp	0,5
LENGTH_L	42
Length (l1)	20
Length (l2)	15
z1	7

Product code

Item no EAN	4021598121751
Item no GF	35001059403
Item no GTIN	04021598121751
Item no RSK	1897888
Item no VVS	045452163

Dimensions

Item Unit Height	45
Item Unit Length	65
Item Unit Weight	0,346
Item Unit Width	65
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905463596
Packaging GTIN PL4	06414905495764
Packaging Height PL1	80
Packaging Height PL4	700
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00096
Packaging Volume PL4	0,672
Packaging Weight PL1	0,401
Packaging Weight PL4	191,08
Packaging Width PL1	100
Packaging Width PL4	800

Documents

Page with all documents

↓

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com