


Uponor Uni Pipe PLUS white insulated S10 WLS 035 25x2,5 blue 50m

1062183

- Insulation thickness 10 mm
- thermal conductivity $\lambda=0,035 \text{ W/m}^{\circ}\text{K}$
- round extruded

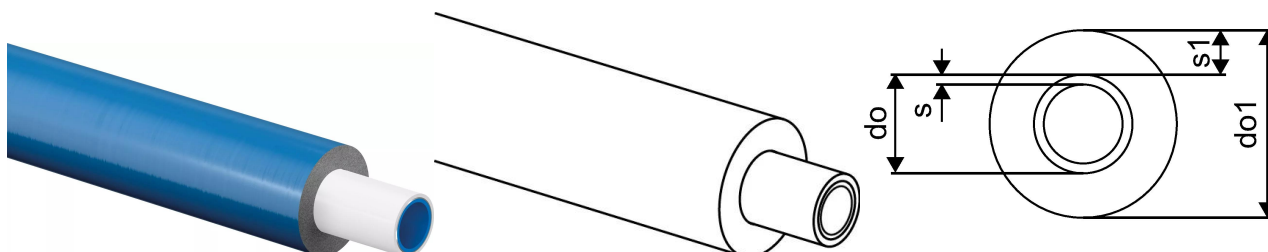

Application information Uponor Uni Pipe PLUS white insulated S10 WLS 035

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor Uni Pipe PLUS white insulated S10 WLS 035 25x2,5 blue 50m

1062183

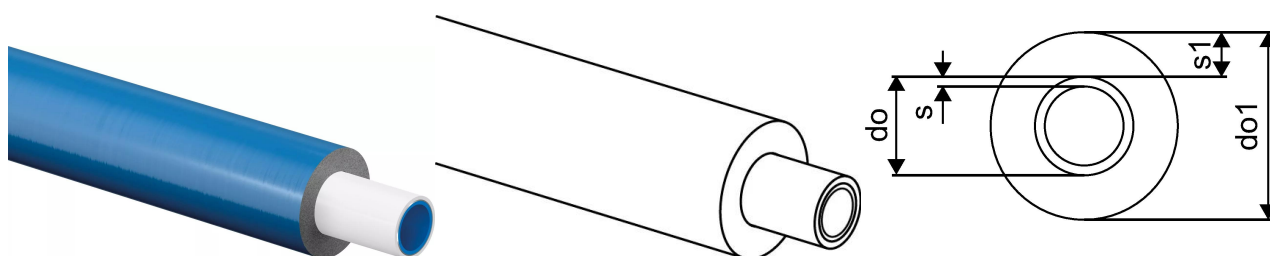**Product code**

Item no EAN	4021598123540
Item no GF	35001062183
Item no GTIN	04021598123540
Item no LVI	1720151
Item no NRF	5071203
Item no RSK	2004931
Item no VVS	087481325

Dimensions

Item Unit Height	45
Item Unit Length	1000
Item Unit Weight	0,277
Item Unit Width	45
Item_UOM	m

Measurements

Outer Diameter_do	25
Outer Diameter_do1	45
Wall thickness_s	2,5
Wall thickness_s1	10

Packaging

Packaging GTIN PL1	06414905412907
Packaging GTIN PL4	06414905412914
Packaging Height PL1	256
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1140
Packaging Quantity PL1	50
Packaging Quantity PL4	350

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,3326976
Packaging Volume PL4	2,5992
Packaging Weight PL1	13,989
Packaging Weight PL4	107,45
Packaging Width PL1	1140
Packaging Width PL4	1140

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com