
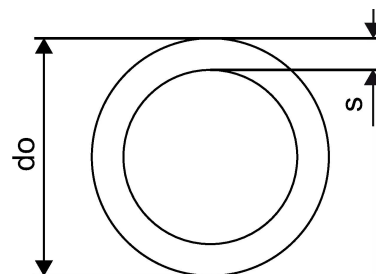


Uponor Comfort Pipe Minitec 9,9x1,1 240m

1063289

- Material: PE-Xa

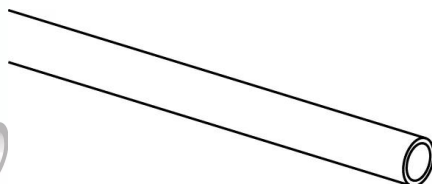

Application information Uponor Comfort Pipe Minitec

Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Manufactured according to EN ISO 15875
- EVOH oxygen diffusion barrier according to DIN 4726
- Application class 4 for underfloor heating and low-temperature radiators
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Natural pipe color
- Available in multiple diameters and coil lengths
- Minitec variant available with 9.9 mm diameter for low-build systems

Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds

Uponor Comfort Pipe Minitec 9,9x1,1 240m

1063289



Product code

Item no EAN	7321500056681
Item no GF	35001063289
Item no GTIN	07321500056681
Item no LVI	2012144
Item no NOBB	50387585
Item no NRF	8361055
Item no RSK	2419975
Item no VVS	087230074

Dimensions

Item Unit Height	10
Item Unit Length	1000
Item Unit Weight	0,038
Item Unit Width	10
Item_UOM	m

Measurements

Outer Diameter_do	9,9
Wall thickness_s	1,1

Packaging

Packaging GTIN PL1	06414905413379
Packaging GTIN PL4	06414905413386
Packaging Height PL1	100
Packaging Height PL4	924
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	240
Packaging Quantity PL4	2640
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,06084
Packaging Volume PL4	0,88704
Packaging Weight PL1	10,476
Packaging Weight PL4	118,6
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com