


Uponor Uni Pipe PLUS white insulated S6 WLS 035 16x2,0 blue 75m

1063556

- coil
- Insulation thickness 6 mm
- thermal conductivity $\lambda=0,035 \text{ W/m}\cdot\text{k}$
- round extruded

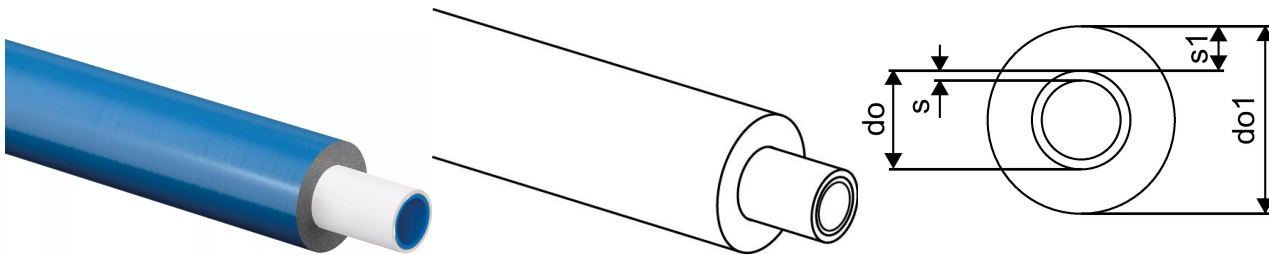

Application information Uponor Uni Pipe PLUS white insulated S6 WLS 035

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor Uni Pipe PLUS white insulated S6 WLS 035 16x2,0 blue 75m

1063556

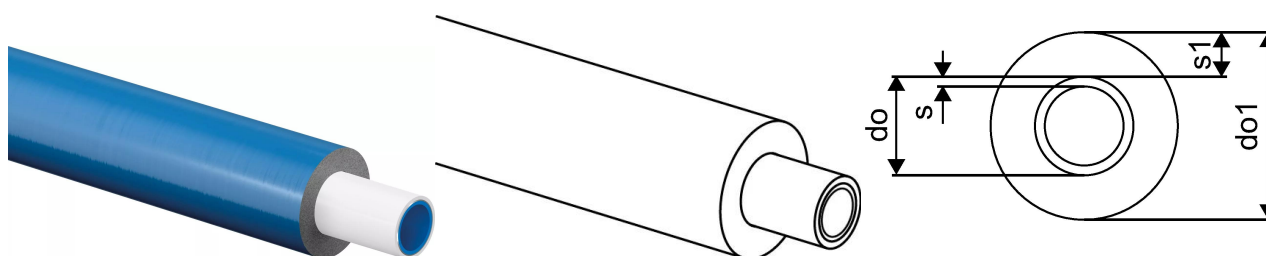**Product code**

Item no EAN	4021598124462
Item no GF	35001063556
Item no GTIN	04021598124462
Item no VVS	087483116

Dimensions

Item Unit Height	28
Item Unit Length	1000
Item Unit Weight	0,138
Item Unit Width	28
Item_UOM	m

Measurements

Outer Diameter_do	16
Outer Diameter_do1	28
Wall thickness_s	2
Wall thickness_s1	6

Packaging

Packaging GTIN PL1	06414905413461
Packaging GTIN PL4	06414905413478
Packaging Height PL1	295
Packaging Height PL4	2000
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	75
Packaging Quantity PL4	600
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,179478

Packaging Volume PL4	1,92
Packaging Weight PL1	10,454
Packaging Weight PL4	107,8
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com