
# Product data sheet




# GF Uponor S-Press PLUS adapter male thread MT 20-R1"

## 1070506

- Made of tin-plated DR brass (lead-free)

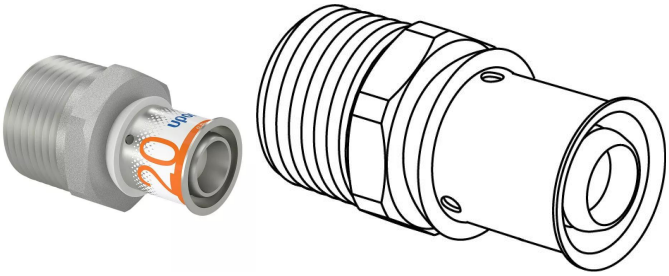




## Application information GF Uponor S-Press PLUS adapter male thread MT

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


### Certification


- Approvals by local OM.

E.g.
- DVGW
- AENOR

# GF Uponor S-Press PLUS adapter male thread MT 20-R1"

## 1070506

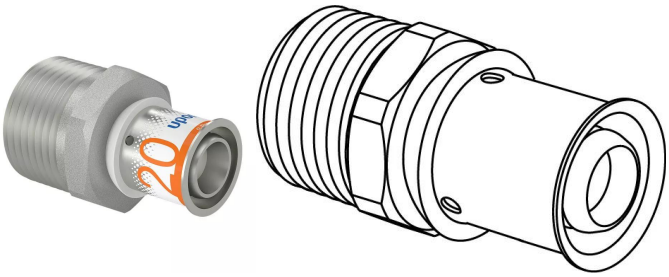




### Product code

| | |
|---|---|
| Item no EAN | 6414905218264 |
| Item no GF | 35001070506 |
| Item no GTIN | 06414905218264 |
| Item no LVI | 1720176 |
| Item no NOBB | 55171805 |
| Item no NRF | 5114432 |
| Item no RSK | 1899415 |
| Item no VVS | 045481249 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 38 |
| Item Unit Length | 50.5 |
| Item Unit Weight | 0,097 |
| Item Unit Width | 38 |
| Item_UOM | pce |

### Measurements

| | |
|---|---|
| LENGTH_L | 50,5 |
| Length (l1) | 14,5 |
| Length (l2) | 21,3 |
| Male_thread_R | 1 |
| z1 | 14,7 |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414905278275 |
| Packaging GTIN PL3 | 06414905635450 |
| Packaging GTIN PL4 | 06414905278299 |
| Packaging Height PL1 | 89 |

| | |
|---|---|
| Packaging Height PL3 | 188 |
| Packaging Height PL4 | 708 |
| Packaging Length PL1 | 176 |
| Packaging Length PL3 | 277 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 10 |
| Packaging Quantity PL3 | 80 |
| Packaging Quantity PL4 | 3840 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,001049488 |
| Packaging Volume PL3 | 0,009321604 |
| Packaging Volume PL4 | 0,67968 |
| Packaging Weight PL1 | 1,3 |
| Packaging Weight PL3 | 10,936 |
| Packaging Weight PL4 | 549,928 |
| Packaging Width PL1 | 67 |
| Packaging Width PL3 | 179 |
| Packaging Width PL4 | 800 |

## Documents

Page with all documents

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**



**Uponor Corporation**

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+