
Product data sheet




GF Uponor S-Press PLUS bend 90° 16-16

1070527

- Made of tin-plated DR brass (lead-free)
- Made of casted DR brass
- extra low pressure loss

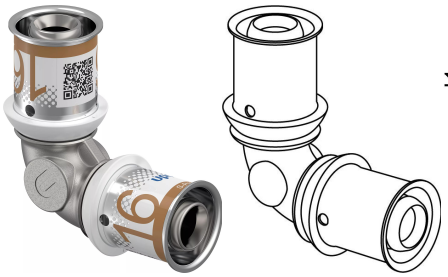



Application information GF Uponor S-Press PLUS bend 90°

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS bend 90° 16-16

1070527

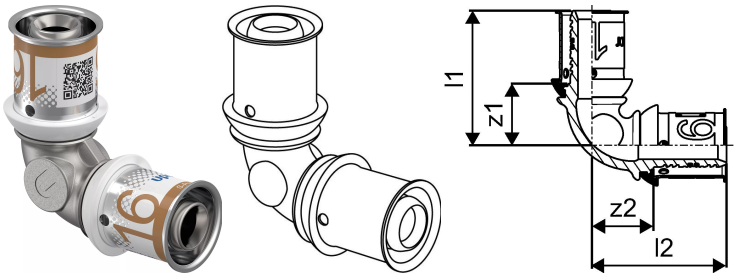

Product code

Item no EAN	6414905218479
Item no GF	35001070527
Item no GTIN	06414905218479
Item no LVI	1720803
Item no NOBB	55171983
Item no NRF	5114454
Item no RSK	1896557
Item no VVS	045470216

Dimensions

Item Unit Height	47.3
Item Unit Length	47.3
Item Unit Weight	0,054
Item Unit Width	21.9
Item_UOM	pce

Measurements

Length (l1)	37
Length (l2)	37
z1	17
Z2	17

Packaging

Packaging GTIN PL1	06414905278985
Packaging GTIN PL3	06414905424948
Packaging GTIN PL4	06414905279005
Packaging Height PL1	89
Packaging Height PL3	95

Packaging Height PL4	714
Packaging Length PL1	87
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000518781
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,56
Packaging Weight PL3	4,58
Packaging Weight PL4	463,68
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+