


## Uponor S-Press PLUS elbow 45° 25-25

1070545

- Made of tin-plated DR brass

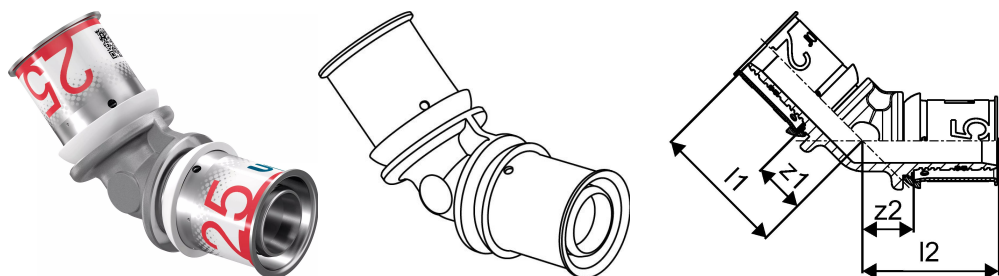

### Application information Uponor S-Press PLUS elbow 45°

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS elbow 45° 25-25

1070545

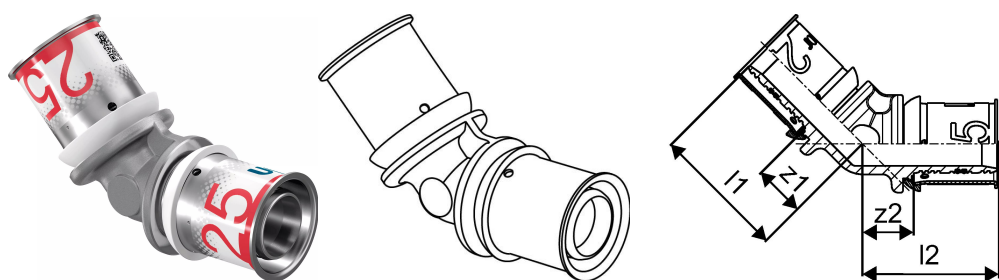

### Product code

Item no EAN	6414905218653
Item no GF	35001070545
Item no GTIN	06414905218653
Item no LVI	1720733
Item no NOBB	55172161
Item no NRF	5114474
Item no RSK	1896547
Item no VVS	045473025

### Dimensions

Item Unit Height	59.5
Item Unit Length	88.7
Item Unit Weight	0,171
Item Unit Width	33
Item_UOM	pce

### Measurements

Length (l1)	46
Length (l2)	46
z1	18
Z2	18

### Packaging

Packaging GTIN PL1	06414905280049
Packaging GTIN PL3	06414905424337
Packaging GTIN PL4	06414905280063
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714
Packaging Length PL1	176

Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL3	20
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,892
Packaging Weight PL3	3,768
Packaging Weight PL4	377,28
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)