
Product data sheet




GF Uponor S-Press PLUS tee male thread MT 16-R1/2"-16

1070592

- Made of tin-plated DR brass (lead-free)

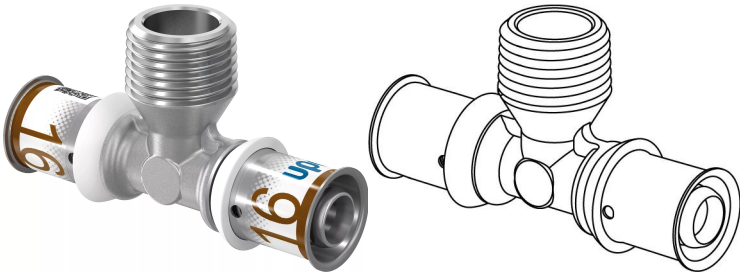



Application information GF Uponor S-Press PLUS tee male thread MT

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.


E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS tee male thread MT 16-R1/2"-16

1070592



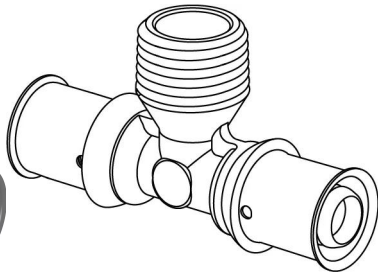



Product code

Item no EAN	6414905219124
Item no GF	35001070592
Item no GTIN	06414905219124
Item no LVI	1720766
Item no NOBB	55172494
Item no NRF	5114511
Item no RSK	1808028
Item no VVS	045477189

Dimensions

Item Unit Height	41.1
Item Unit Length	73
Item Unit Weight	0,095
Item Unit Width	21.9
Item_UOM	pce

Measurements

Length (l1)	37,5
Length (l2)	30,3
Length (l3)	37,5
Male_thread_R	1/2
z1	17,7
Z2	14,5
Z3	17,7

Packaging

Packaging GTIN PL1	06414905468607
Packaging GTIN PL3	06414905424665

Packaging GTIN PL4	06414905499533
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,987
Packaging Weight PL3	4,148
Packaging Weight PL4	413,76
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+