


## Uponor S-Press PLUS U-tap elbow 16-Rp1/2"FT-20

1070632

- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

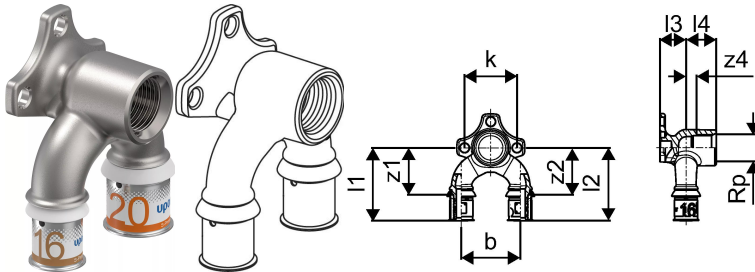

### Application information Uponor S-Press PLUS U-tap elbow

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS U-tap elbow 16-Rp1/2"FT-20

1070632

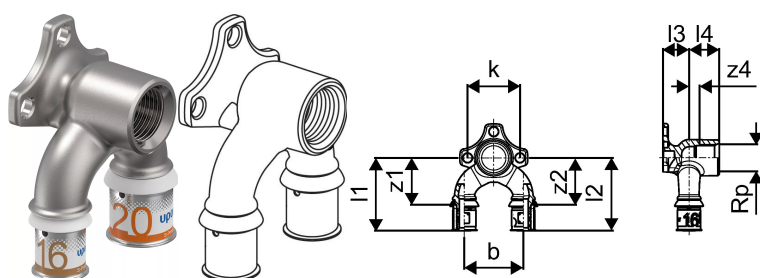

## Measurements

|                  |      |
|------------------|------|
| Female thread Rp | 1/2  |
| Length (l1)      | 55,5 |
| Length (l2)      | 57   |
| Length (l3)      | 20   |
| Z Measurement b  | 45   |
| Z Measurement k  | 40   |
| z1               | 35,7 |
| Z2               | 35,7 |
| Z4               | 8    |

## Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905219483  |
| Item no GF   | 35001070632    |
| Item no GTIN | 06414905219483 |

## Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 43    |
| Item Unit Length | 83    |
| Item Unit Weight | 0,246 |
| Item Unit Width  | 68.9  |
| Item_UOM         | pce   |

## Packaging

|                        |                |
|------------------------|----------------|
| Packaging GTIN PL1     | 06414905468881 |
| Packaging GTIN PL4     | 06414905499816 |
| Packaging Height PL1   | 89             |
| Packaging Height PL4   | 678            |
| Packaging Length PL1   | 176            |
| Packaging Length PL4   | 1200           |
| Packaging Quantity PL1 | 5              |

|                        |            |
|------------------------|------------|
| Packaging Quantity PL4 | 960        |
| Packaging Type PL1     | Base_Box   |
| Packaging Type PL4     | Pallet     |
| Packaging Volume PL1   | 0,00211464 |
| Packaging Volume PL4   | 0,65088    |
| Packaging Weight PL1   | 1,31       |
| Packaging Weight PL4   | 275,52     |
| Packaging Width PL1    | 135        |
| Packaging Width PL4    | 800        |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com