
Product data sheet



GF Uponor S-Press PLUS U-tap elbow FT 25-Rp1/2"-20

1070634

- Made of tin-plated DR brass (lead-free)
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

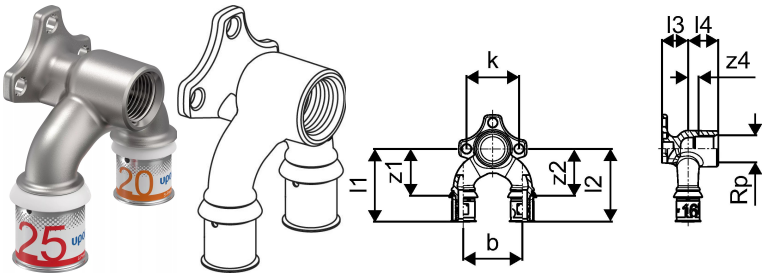

Application information GF Uponor S-Press PLUS U-tap elbow FT

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS U-tap elbow FT 25-Rp1/2"-20

1070634

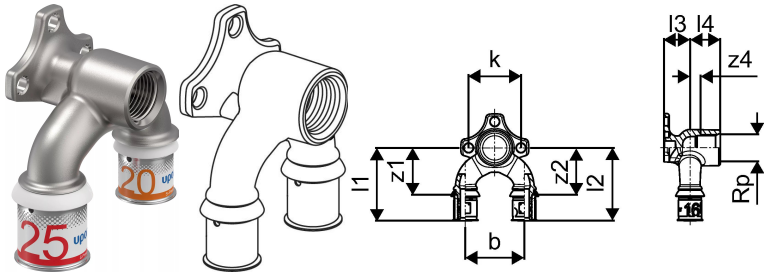

Measurements

Female thread Rp	1/2
Length (l1)	64
Length (l2)	57
Length (l3)	27
Length L4	24
Z Measurement b	60
Z Measurement k	40
z1	35,7
Z2	35,7
Z3	9

Product code

Item no EAN	6414905219506
Item no GF	35001070634
Item no GTIN	06414905219506

Dimensions

Item Unit Height	51
Item Unit Length	90
Item Unit Weight	0,337
Item Unit Width	89.5
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905468904
Packaging GTIN PL4	06414905499830
Packaging Height PL1	89
Packaging Height PL4	678

Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,091
Packaging Weight PL4	233,472
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+