
# Product data sheet



# GF Uponor S-Press PLUS tap elbow twin 90° FT 16-Rp1/2"-16

## 1070648

- Made of tin-plated DR brass (lead-free)
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.
- Thread acc. to EN ISO 228-1

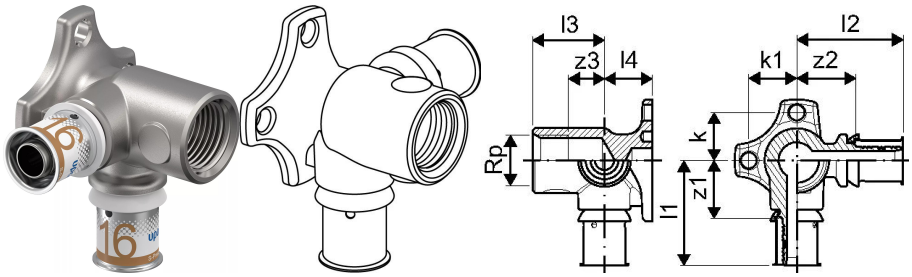


## Application information GF Uponor S-Press PLUS tap elbow twin 90° FT

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


### Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

# GF Uponor S-Press PLUS tap elbow twin 90° FT 16-Rp1/2"-16

## 1070648

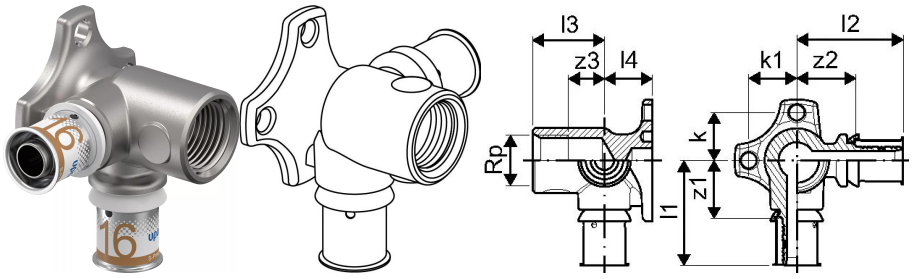


### Measurements

| | |
|---|---|
| Female thread Rp | 1/2 |
| Length (l1) | 44 |
| Length (l2) | 44,5 |
| Length (l3) | 30 |
| Length L4 | 20 |
| Z Measurement k | 20 |
| Z Measurement k1 | 20 |
| z1 | 24,2 |
| Z2 | 24,7 |
| Z3 | 15 |

### Product code

| | |
|---|---|
| Item no EAN | 6414905219643 |
| Item no GF | 35001070648 |
| Item no GTIN | 06414905219643 |
| Item no NOBB | 55172876 |
| Item no NRF | 5114557 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 50 |
| Item Unit Length | 70.5 |
| Item Unit Weight | 0,235 |
| Item Unit Width | 69.5 |
| Item_UOM | pce |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414905279814 |
| Packaging GTIN PL3 | 06414905425006 |

| | |
|---|---|
| Packaging GTIN PL4 | 06414905279838 |
| Packaging Height PL1 | 85 |
| Packaging Height PL3 | 182 |
| Packaging Height PL4 | 666 |
| Packaging Length PL1 | 165 |
| Packaging Length PL3 | 275 |
| Packaging Length PL4 | 800 |
| Packaging Quantity PL1 | 10 |
| Packaging Quantity PL3 | 40 |
| Packaging Quantity PL4 | 1920 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,0018513 |
| Packaging Volume PL3 | 0,00885885 |
| Packaging Volume PL4 | 0,63936 |
| Packaging Weight PL1 | 2,357 |
| Packaging Weight PL3 | 9,558 |
| Packaging Weight PL4 | 478,784 |
| Packaging Width PL1 | 132 |
| Packaging Width PL3 | 177 |
| Packaging Width PL4 | 1200 |

## Documents

Page with all documents

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**



**Uponor Corporation**

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+