


Uponor S-Press PLUS adapter wall penetr. 16-G1/2"FT

1070652

- For lead-through through walls.
- Dimensions of attachment plate (H x W x D) 100 x 50 x 2 mm.
- Hole circle diameter 33 mm.

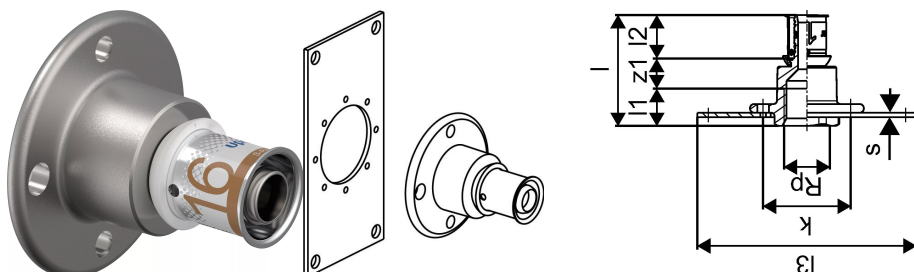

Application information Uponor S-Press PLUS adapter wall penetr.

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS adapter wall penetr. 16-G1/2"FT

1070652

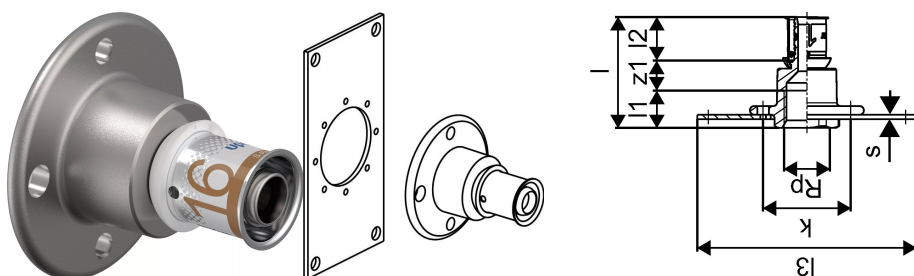

Measurements

Female thread Rp 0,5

LENGTH_L 50,5

Length (l1) 17

Length (l2) 19,8

Length (l3) 100

Wall thickness_s 2

Z Measurement k 40

z1 13,7

Product code

Item no EAN 6414905219681

Item no GF 35001070652

Item no GTIN 06414905219681

Item no NRF 5071608

Dimensions

Item Unit Height 52.2

Item Unit Length 100

Item Unit Weight 0,14

Item Unit Width 50.5

Item_UOM pce

Packaging

Packaging GTIN PL1 06414905468959

Packaging GTIN PL2 06414905442850

Packaging GTIN PL4 06414905499878

Packaging Height PL1 57

Packaging Height PL2 89

Packaging Height PL4 678

Packaging Length PL1 105

Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	5
Packaging Quantity PL4	960
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00033516
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,141
Packaging Weight PL2	0,739
Packaging Weight PL4	174,72
Packaging Width PL1	56
Packaging Width PL2	135
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com