
Product data sheet



GF Uponor S-Press PLUS tap elbow LWC FT 16-Rp1/2" l=35

1070654

- Made of tin-plated DR brass (lead-free)
- Incl. twist-proof attachment and sound protection
- For lead-through through walls.

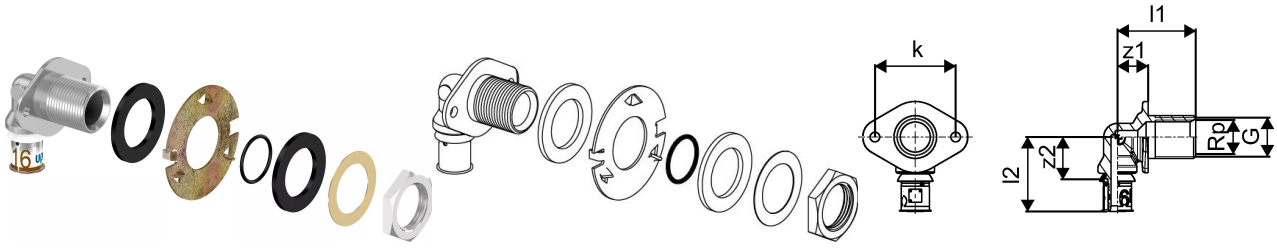

Application information GF Uponor S-Press PLUS tap elbow LWC FT

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS tap elbow LWC FT 16-Rp1/2" l=35

1070654

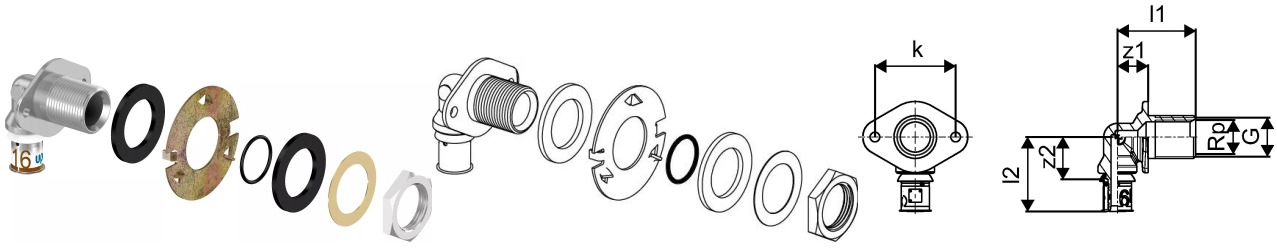

Measurements

Cylindric_thread_G	3/4
Female thread Rp	1/2
Length (l1)	58,5
Length (l2)	46
Z Measurement k	50
z1	19
Z2	26,2

Product code

Item no EAN	6414905219704
Item no GF	35001070654
Item no GTIN	06414905219704

Dimensions

Item Unit Height	78
Item Unit Length	70
Item Unit Weight	0,276
Item Unit Width	65
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905479207
Packaging GTIN PL2	06414905479214
Packaging GTIN PL4	06414905479221
Packaging Height PL1	83
Packaging Height PL2	89
Packaging Height PL4	678
Packaging Length PL1	75

Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	5
Packaging Quantity PL4	960
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00043575
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,277
Packaging Weight PL2	1,465
Packaging Weight PL4	305
Packaging Width PL1	70
Packaging Width PL2	135
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+