


Uponor S-Press PLUS elbow adapter UPS 16-Rp1/2"FT

1070657

- Made of tin-plated DR brass

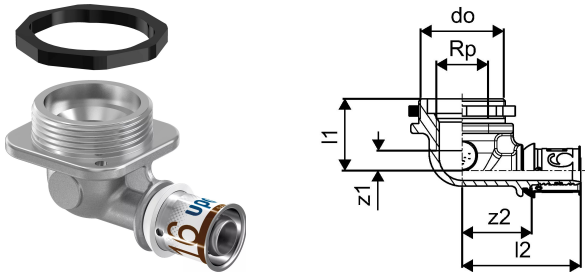

Application information Uponor S-Press PLUS elbow adapter UPS

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS elbow adapter UPS 16-Rp1/2"FT

1070657

**Measurements**

Female thread Rp	0,5
------------------	-----

Metric thread M	35x1,5
-----------------	--------

Product code

Item no EAN	6414905219735
-------------	---------------

Item no GF	35001070657
------------	-------------

Item no GTIN	06414905219735
--------------	----------------

Dimensions

Item Unit Height	39.9
------------------	------

Item Unit Length	69.5
------------------	------

Item Unit Weight	0,164
------------------	-------

Item Unit Width	43
-----------------	----

Item_UOM	pce
----------	-----

Packaging

Packaging GTIN PL1	06414905280803
--------------------	----------------

Packaging GTIN PL2	06414905280810
--------------------	----------------

Packaging GTIN PL4	06414905280827
--------------------	----------------

Packaging Height PL1	45
----------------------	----

Packaging Height PL2	89
----------------------	----

Packaging Height PL4	678
----------------------	-----

Packaging Length PL1	75
----------------------	----

Packaging Length PL2	176
----------------------	-----

Packaging Length PL4	1200
----------------------	------

Packaging Quantity PL1	1
------------------------	---

Packaging Quantity PL2	10
------------------------	----

Packaging Quantity PL4	1920
------------------------	------

Packaging Type PL1	Plastic_Bag
--------------------	-------------

Packaging Type PL2	Medium_Box
--------------------	------------

Packaging Type PL4	Pallet
Packaging Volume PL1	0,000162
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,165
Packaging Weight PL2	1,679
Packaging Weight PL4	356,16
Packaging Width PL1	48
Packaging Width PL2	135
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com