
Product data sheet



GF Uponor S-Press PLUS radi elbow adapter, plated 16-15CU l=1000

1070679

- With copper pipe 15 x 1 mm and 22 x 1 mm, plated.
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

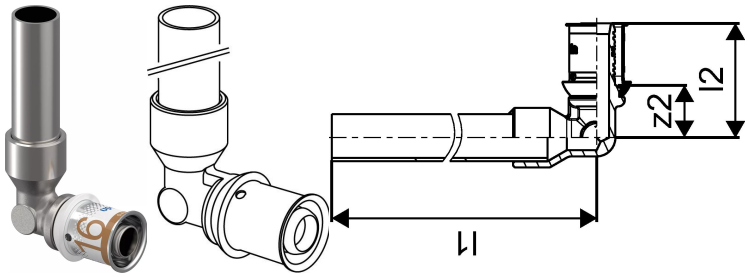

Application information GF Uponor S-Press PLUS radi elbow adapter, plated

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS radi elbow adapter, plated 16-15CU l=1000

1070679

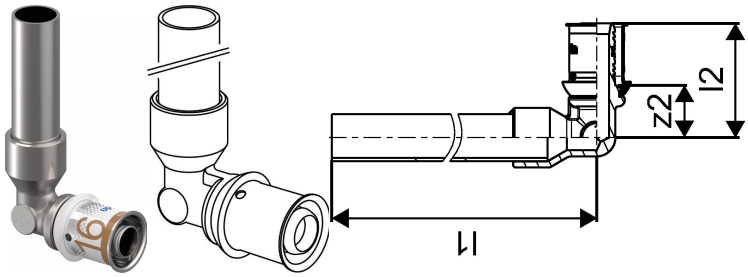

Product code

Item no EAN	6414905219957
Item no GF	35001070679
Item no GTIN	06414905219957
Item no RSK	1896566
Item no VVS	404730036

Dimensions

Item Unit Height	46
Item Unit Length	1126.6
Item Unit Weight	0,428
Item Unit Width	21.9
Item_UOM	pce

Measurements

Length (l1)	1116
Length (l2)	36,5
Z2	16,7

Packaging

Packaging GTIN PL1	06414905286942
Packaging GTIN PL4	06414905286959
Packaging Height PL1	80
Packaging Height PL4	544
Packaging Length PL1	1150
Packaging Length PL4	1200
Packaging Material (number) PL1	20
Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP

Packaging Quantity PL1	20
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0184
Packaging Volume PL4	0,52224
Packaging Weight PL1	8,87
Packaging Weight PL4	201,4
Packaging Width PL1	200
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	Corrugated fibreboard

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+