
Product data sheet




GF Uponor S-Press PLUS radi crossing, insulated 16-16-16

1070689

- For cross-over-free connection of a radiator on the raw floor
- Incl. insulation box, consisting of upper and lower part made of EPP (expanded polypropylene) with 13 mm insulation layer (corresponds to 50 % insulation in compliance with EnEV), WLG 035. Meets EnEV requirements in respect of pipe cross-overs and wall penetrations!
- Dimensions of insulation box
- (Length x Width x Height): 115 x 115 x 55 mm.



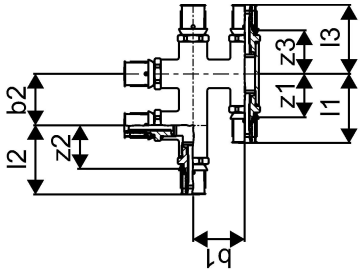

Application information GF Uponor S-Press PLUS radi crossing, insulated

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS radi crossing, insulated 16-16-16

1070689



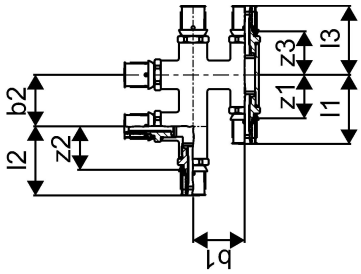

Product code

Item no EAN	6414905220052
Item no GF	35001070689
Item no GTIN	06414905220052
Item no RSK	2194837

Dimensions

Item Unit Height	56
Item Unit Length	147
Item Unit Weight	0,57
Item Unit Width	131.5
Item_UOM	pce

Measurements

Length (l1)	53,5
Length (l2)	53,5
Length (l3)	53,5
Wall thickness_s	40
Z Measurement b1	40
Z Measurement b2	40
z1	33,7
Z2	33,7
Z3	33,7

Packaging

Packaging GTIN PL1	06414905469000
Packaging GTIN PL4	06414905499939
Packaging Height PL1	89
Packaging Height PL4	678

Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	192
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,65
Packaging Weight PL4	148,8
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+