


Uponor Ecoflex coupling PN6 125x11,4-R4

1078368

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Conical thread R", hemp sealing
- Cannot be used with Wipex fittings!
- DR = dezincification resistance brass

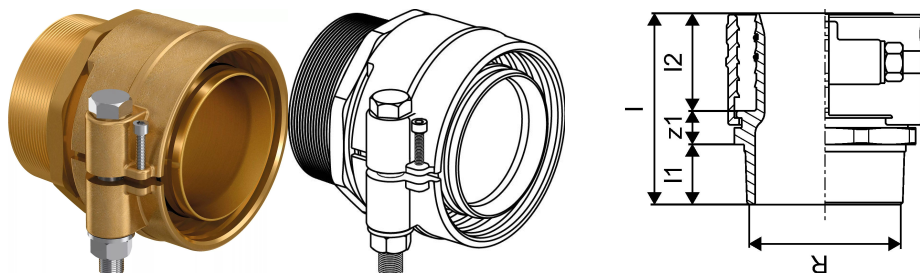

Application information Uponor Ecoflex coupling PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex coupling PN6 125x11,4-R4

1078368

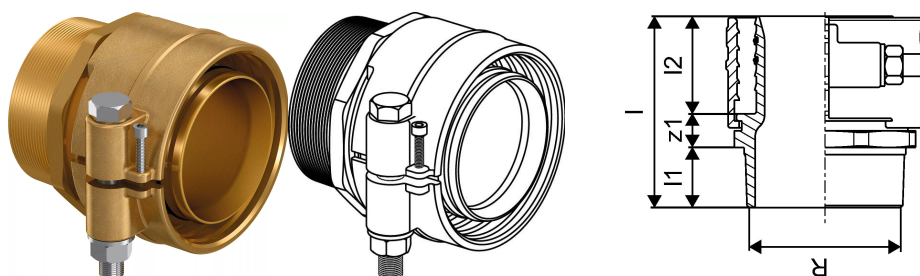

Product code

Item no EAN	4021598130272
Item no GF	35001078368
Item no GTIN	04021598130272
Item no LVI	1938513
Item no NOBB	49606953
Item no NRF	8361341
Item no RSK	2282488
Item no VVS	087883425

Dimensions

Item Unit Height	140
Item Unit Length	140
Item Unit Weight	4,99
Item Unit Width	160
Item_UOM	pce

Measurements

LENGTH_L	137
Length (l1)	43
Length (l2)	70
Male_thread_R	4
Wall thickness_s	11,4
z1	24

Packaging

Packaging GTIN PL1	06414900396783
Packaging Height PL1	155
Packaging Length PL1	270
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box

Packaging Volume PL1	0,00837
Packaging Weight PL1	5,10
Packaging Width PL1	200

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com