


Uponor Ecoflex flange F100/8-180/Rp4

1078370

- Thread Rp", hemp sealing
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- Stainless steel

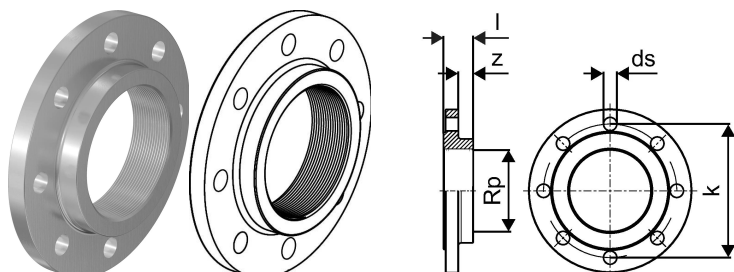

Application information Uponor Ecoflex flange

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex flange F100/8-180/Rp4

1078370

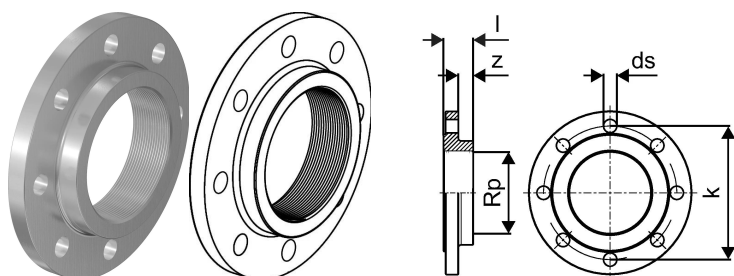

Measurements

Female thread Rp	4
LENGTH_L	40
Z Measurement k	180
Z	20

Product code

Item no EAN	4021598130296
Item no GF	35001078370
Item no GTIN	04021598130296
Item no LVI	1938515
Item no NOBB	49606972
Item no NRF	8361343
Item no RSK	2282490
Item no VVS	087844092

Dimensions

Item Unit Height	40
Item Unit Length	220
Item Unit Weight	4,62
Item Unit Width	220
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905469543
Packaging Height PL1	40
Packaging Length PL1	220
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,001936
Packaging Weight PL1	4,70

Packaging Width PL1

220

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com