


Uponor Vario M manifold with flowmeter FM 3xG3/4 Euro

1085945

- with flowmeter and eurocone thread

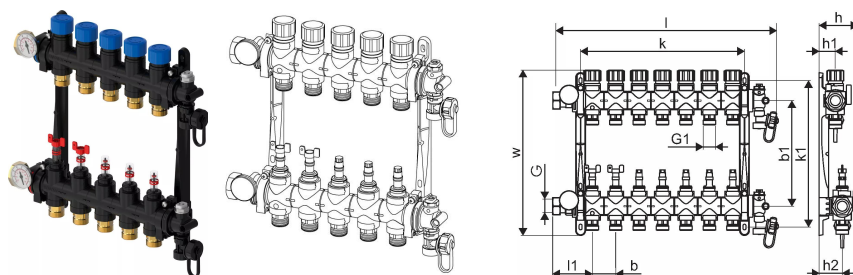

Application information Uponor Vario M manifold with flowmeter FM

Specification


- Made of fibre glass reinforced polyamid
- With integrated valves
- Connection right or left G1 with flat sealing
- Supply bar with flowmeter for balancing and shut-off
- Return bar with return valves and caps
- Integrated airvents and fill&drain points in supply and return
- Loop connection: G3/4" eurocone
- Loop pitch: 50 mm

Application

- For underfloor heating and cooling
- Max. pressure: 6 bar at 60°C
- Combineable with actuators FT 30x1,5

Uponor Vario M manifold with flowmeter FM 3xG3/4 Euro

1085945

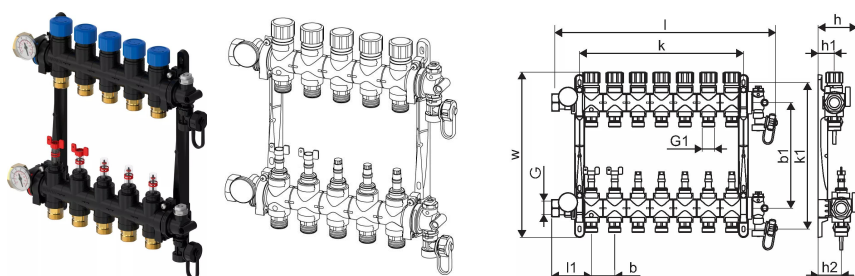

Measurements

Cylindric_thread_G	1
Cylindric_thread_G1	3/4
LENGTH_L	275
Length (l1)	85
Z Measurement b	50
Z Measurement b1	225
Z Measurement h	83
Z Measurement h1	34
Z Measurement h2	49
Z Measurement k	112
Z Measurement k1	312
Z Measurement w	353

Product code

Item no EAN	4021598133747
Item no GF	35001085945
Item no GTIN	04021598133747

Dimensions

Item Unit Height	85
Item Unit Length	270
Item Unit Weight	1,42
Item Unit Width	360
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905471089
Packaging GTIN PL4	06414900329378
Packaging Height PL1	149
Packaging Height PL4	930

Packaging Length PL1	334
Packaging Length PL4	800
Packaging Quantity PL1	1
Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,009156944
Packaging Volume PL4	0,8928
Packaging Weight PL1	1,77
Packaging Weight PL4	184,3
Packaging Width PL1	184
Packaging Width PL4	1200

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com