


Uponor Vario S thermometer

1086537

- For displaying flow or return temperature
- 1 piece

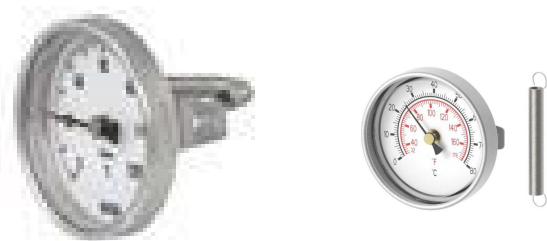

Application information Uponor Vario S thermometer

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S thermometer

1086537

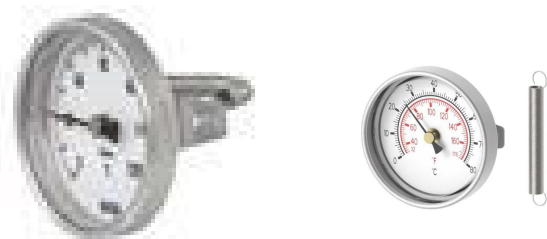

Measurements

Inner_diameter_di	5
Outer Diameter_do	64
Z Measurement h	5

Product code

Item no EAN	4021598135185
Item no GF	35001086537
Item no GTIN	04021598135185
Item no LVI	2022136
Item no VVS	046230410

Dimensions

Item Unit Height	50
Item Unit Length	64
Item Unit Weight	0,053
Item Unit Width	50
Item_UOM	set

Packaging

Packaging GTIN PL1	06414905473663
Packaging GTIN PL3	06414905473670
Packaging Height PL1	50
Packaging Height PL3	72
Packaging Length PL1	80
Packaging Length PL3	379
Packaging Material (number) PL1	4
Packaging Material (number) PL3	20
Packaging Material PL1	Low density polyethylene
Packaging Material PL3	Corrugated fibreboard
Packaging Material (short) PL1	LDPE

Packaging Material (short) PL3	PAP
Packaging Quantity PL1	1
Packaging Quantity PL3	10
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,0002
Packaging Volume PL3	0,00504828
Packaging Weight PL1	0,063
Packaging Weight PL3	8,18
Packaging Width PL1	50
Packaging Width PL3	185
Technical data	
Recycling Text Block PL1	Low density polyethylene
Recycling Text Block PL3	Corrugated fibreboard

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com