


Uponor Smart UFH-pipe 16x2,0 640m

1086576

- UFH pipe made of PE-RT
- complying with ISO 22391 and fulfils the requirement for oxygen diffusion resistance as per DIN 4726
- compatible to Uponor Smart compression fittings
- application class 4
- design pressure 6 Bar at 70°C

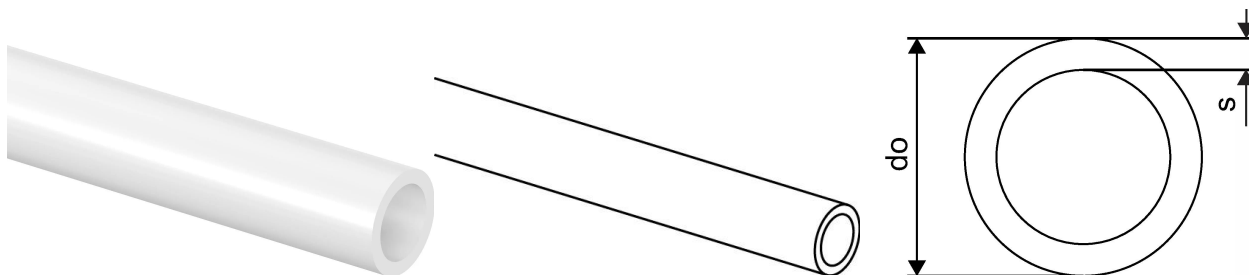

Application information Uponor Smart UFH-pipe

Specification


- Pipe material made of polyethylene of raised temperature resistance (PE-RT)
- Manufactured according to ISO 22391
- Oxygen diffusion resistance according to DIN 4726
- Application class 4/ 5 for underfloor heating and radiators
- Design pressure 6 bar at 70 °C
- Compatible with Uponor Smart system components and fixations
- Available in multiple diameters and coil lengths

Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds

Uponor Smart UFH-pipe 16x2,0 640m

1086576

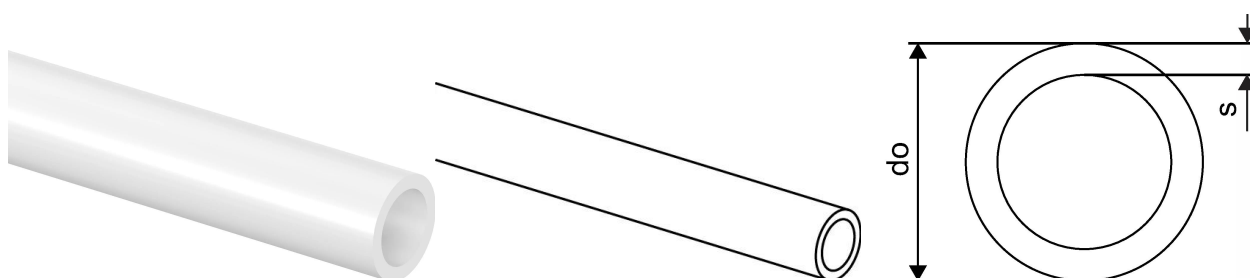

Product code

Item no EAN	7321500058081
Item no GF	35001086576
Item no GTIN	07321500058081
Item no LVI	2022056
Item no RSK	2716764
Item no VVS	087414616

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,092
Item Unit Width	16
Item_UOM	m

Measurements

Outer Diameter_do	16
Wall thickness_s	2

Packaging

Packaging GTIN PL3	06414905284092
Packaging GTIN PL4	06414905284108
Packaging Height PL3	580
Packaging Height PL4	940
Packaging Length PL3	710
Packaging Length PL4	1200
Packaging Quantity PL3	640
Packaging Quantity PL4	1280
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,292378

Packaging Volume PL4	0,9024
Packaging Weight PL3	59,88
Packaging Weight PL4	144,76
Packaging Width PL3	710
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com