


Uponor Smatrix Wave slave module Pulse M-262 6X

1093133

- 6 channel slave module for Uponor Smatrix Wave controller Pulse X-265 6X
- supports up to 6 room thermostats and 6 actuators
- click-in installation
- protection class: IP20
- color: white

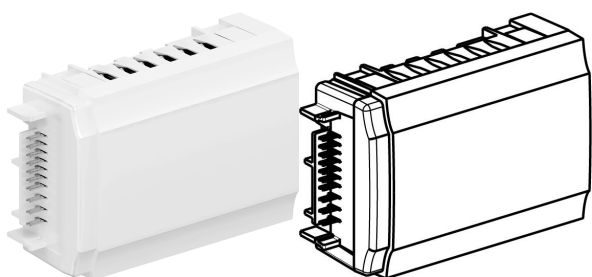

Application information Uponor Smatrix Wave slave module Pulse M-262 6X

Specification

- modular system includes controller, expansion module, com module with app for mobile devices, relay modules, thermostats and sensors
- wireless connections with Smatrix Wave thermostats
- up to 8 room thermostats and 10 actuators (24V) per controller
- up to 14 room thermostats and 16 actuators (24V) per controller with expansion module
- up to 4 controllers in one system, wireless connected
- pump and boiler relays (output) with every controller
- 4 outputs in total for systems with relay module M-161, configurable via app
- heating/cooling switch input
- heating/cooling change with thermostat T-267
- relative humidity control with thermostats and sensors
- combines underfloor heating/cooling and ceiling cooling control
- app for mobile devices with installation wizard and intuitive user interface
- on-site access with Bluetooth BLE for commissioning and service
- generating installation configurations for repeated use in the app
- remote access via app for internet connected systems
- Smatrix AI for energy savings in installations with heat pumps
- schedule settings, via app or programmable thermostat T-168
- comfort settings
- shut-off function for the seasonal transitional period
- valve and pump exercise
- fast automatic software updates
- supply diagnostics for internet connected systems
- color LEDs on controller providing status information
- operating voltage of controller 230V
- low voltage actuators: 24VAC /0.2A (0.4A peak)

Application


- wireless room temperature control for radiant heating and cooling
- set point range: +5°C ... +35°C

Certification

- CE, UKCA

Uponor Smatrix Wave slave module Pulse M-262 6X

1093133

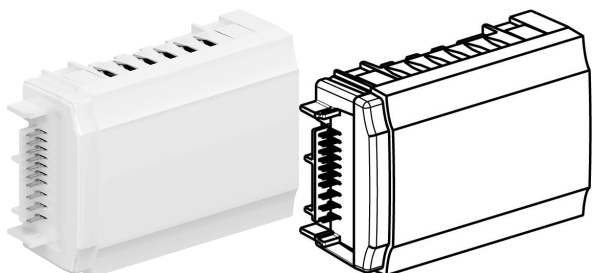**Product code**

Item no EAN	6414905228645
Item no GF	35001093133
Item no GTIN	06414905228645
Item no LVI	2024569
Item no NRF	8361143
Item no RSK	2988496
Item no VVS	466251320

Dimensions

Item Unit Height	50
Item Unit Length	140
Item Unit Weight	0,2730
Item Unit Width	110
Item_UOM	pce

Measurements

LENGTH_L	140
Z Measurement h	50
Z Measurement w	110

Packaging

Packaging GTIN PL1	06414905441648
Packaging GTIN PL2	06414905443406
Packaging GTIN PL4	06414905503988
Packaging Height PL1	70
Packaging Height PL2	300
Packaging Height PL4	1044
Packaging Length PL1	190
Packaging Length PL2	400
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL2	16
Packaging Quantity PL4	384
Packaging Type PL1	Base_Box
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0016625
Packaging Volume PL2	0,036
Packaging Volume PL4	1,00224
Packaging Weight PL1	0,4020
Packaging Weight PL2	7,0720
Packaging Weight PL4	194,7280
Packaging Width PL1	125
Packaging Width PL2	300
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com