


Uponor MLC white insulated S13 BL-S2-D0 25x2,5 blue 50m

1094883

- Material: multilayer pipe, insulated
- in coils

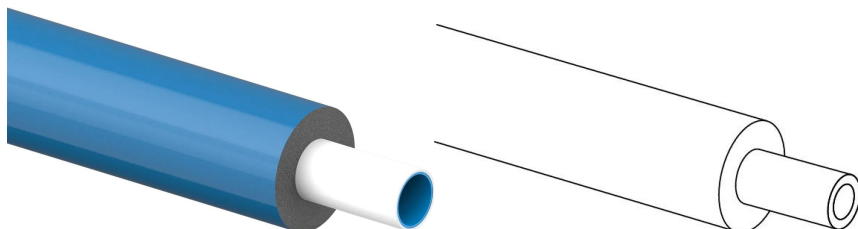

Application information Uponor MLC white insulated S13 BL-S2-D0

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive - longitudinally welded aluminium - adhesive - PE-RT)
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according to EN 806.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor MLC white insulated S13 BL-S2-D0 25x2,5 blue 50m

1094883

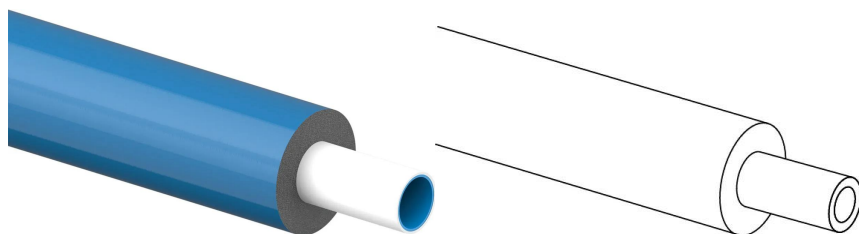

Product code

Item no EAN	6414905297764
Item no GF	35001094883
Item no GTIN	06414905297764

Dimensions

Item Unit Height	51
Item Unit Length	1000
Item Unit Weight	0,2494
Item Unit Width	51
Item_UOM	m

Measurements

Outer Diameter_do	25
Z MEASUREMENT S	2,5

Packaging

Packaging GTIN PL1	06414905421732
Packaging GTIN PL4	06414905422517
Packaging Height PL1	300
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1140
Packaging Quantity PL1	50
Packaging Quantity PL4	200
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,38988
Packaging Volume PL4	2,5992
Packaging Weight PL1	12,595
Packaging Weight PL4	73,575
Packaging Width PL1	1140

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com