


Uponor Ecoflex VIP Thermo Pipe Single 50x4,6/140

1095715

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- VIP + PEX foam, HDPE casing

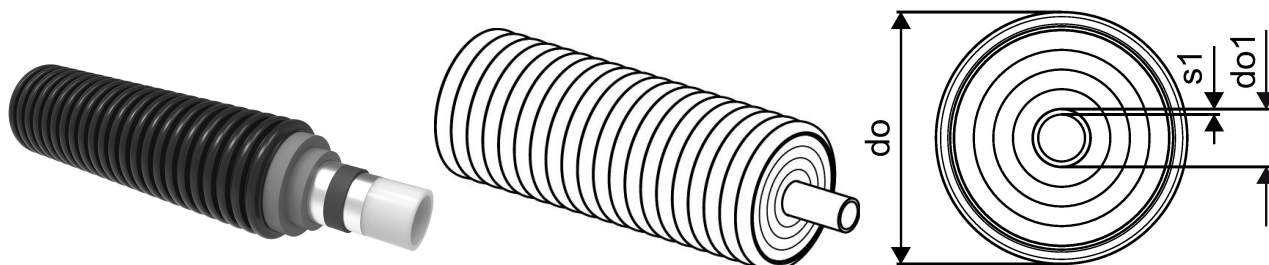

Application information Uponor Ecoflex VIP Thermo Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex VIP Thermo Pipe Single 50x4,6/140

1095715

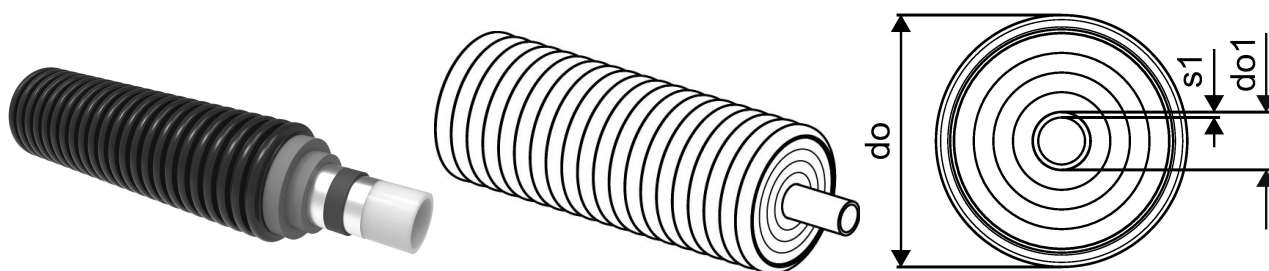**Measurements**

Bending radius M	0,4
Outer Diameter_do	140
Outer Diameter_do1	50
Wall thickness_s1	4,6

Status

Item Available Till date	2027-06-30T00:00:00.000+0200
--------------------------	------------------------------

Product code

Item no EAN	6414905479146
Item no GF	35001095715
Item no GTIN	06414905479146
Item no LVI	3010236
Item no NRF	8360951
Item no RSK	2266361
Item no VVS	087808250
Item Replacement 1	1160602

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,94
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905542444
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil

Packaging Volume PL1	7,26
Packaging Weight PL1	389
Packaging Width PL1	1500

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com