


Uponor Ecoflex VIP Thermo Pipe Single 75x6,8/140

1095717

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- VIP + PEX foam, HDPE casing

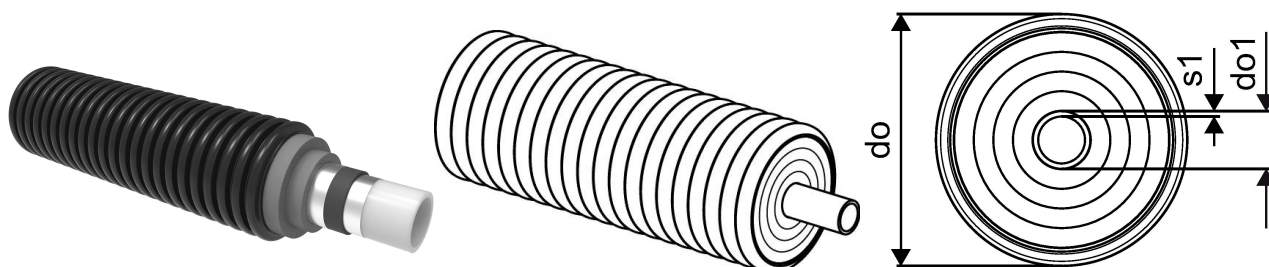

Application information Uponor Ecoflex VIP Thermo Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex VIP Thermo Pipe Single 75x6,8/140

1095717

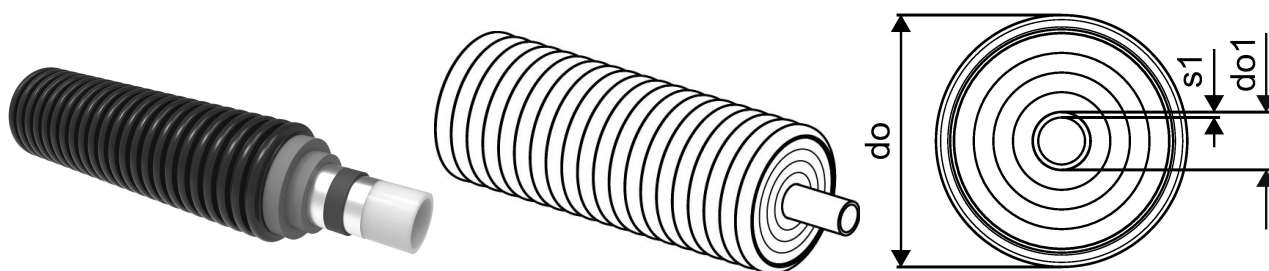**Measurements**

Bending radius M	0,6
Outer Diameter_do	140
Outer Diameter_di	75
Wall thickness_s1	6,8

Status

Item Available Till date	2027-06-30T00:00:00.000+0200
--------------------------	------------------------------

Product code

Item no EAN	6414905479160
Item no GF	35001095717
Item no GTIN	06414905479160
Item no LVI	3010238
Item no NRF	8360953
Item no RSK	2266363
Item no VVS	087808275
Item Replacement 1	1160604

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	2,73
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905479702
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil

Packaging Volume PL1	7,26
Packaging Weight PL1	546
Packaging Width PL1	1500

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com