


Uponor Ecoflex VIP Thermo Pipe Single 90x8,2/175

1095718

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- VIP + PEX foam, HDPE casing

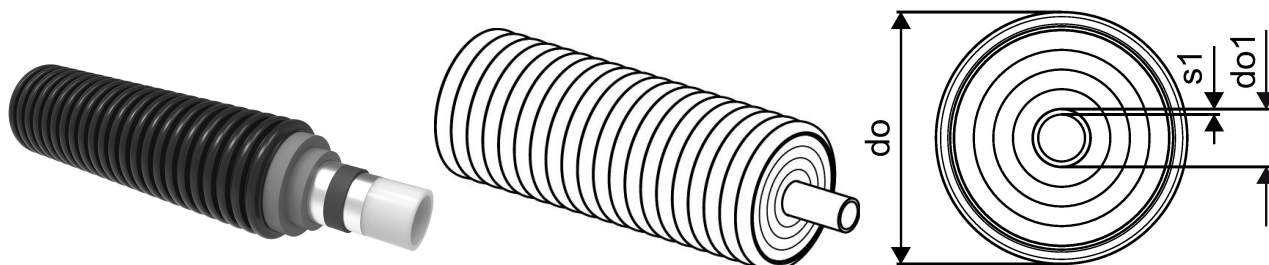

Application information Uponor Ecoflex VIP Thermo Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex VIP Thermo Pipe Single 90x8,2/175

1095718

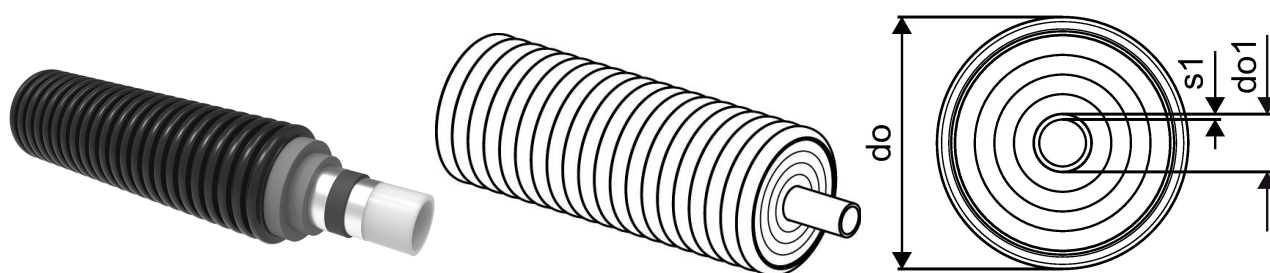**Measurements**

Bending radius M	0,7
Outer Diameter_do	175
Outer Diameter_do1	90
Wall thickness_s1	8,2

Product code

Item no EAN	6414905479177
Item no GF	35001095718
Item no GTIN	06414905479177
Item no LVI	3010239
Item no NRF	8360954
Item no RSK	2266364
Item no VVS	087808290
Item Replacement 1	1160605

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	4
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905640256
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	150
Packaging Type PL1	Coil
Packaging Volume PL1	8,064
Packaging Weight PL1	600

Packaging Width PL1

1400

Status

Until stocks last

Until stocks last

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com