


Uponor Ecoflex Supra Pipe 63x5,8/140

1095726

- Cold potable water and cooling
- One medium pipe PE 100 RC black, SDR 11
- Max. load 16 bar / 20°C
- PEX foam, HDPE casing

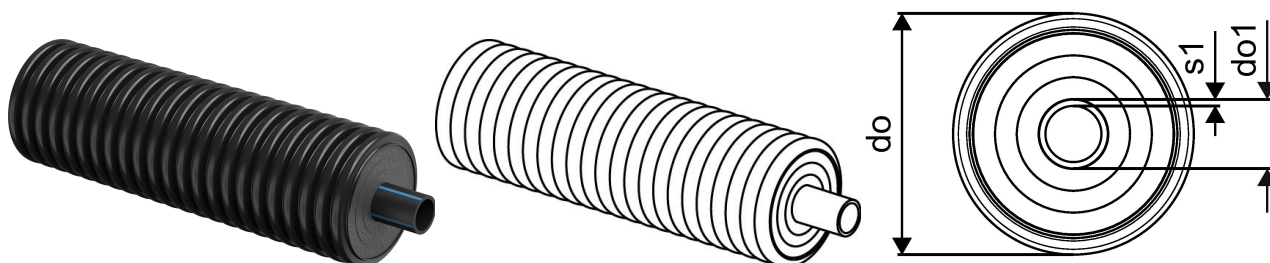

Application information Uponor Ecoflex Supra Pipe

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Polyethylene PE100 RC, PN 16 (SDR 11) black with blue stripes
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of cold potable or cooling water for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Supra Pipe 63x5,8/140

1095726

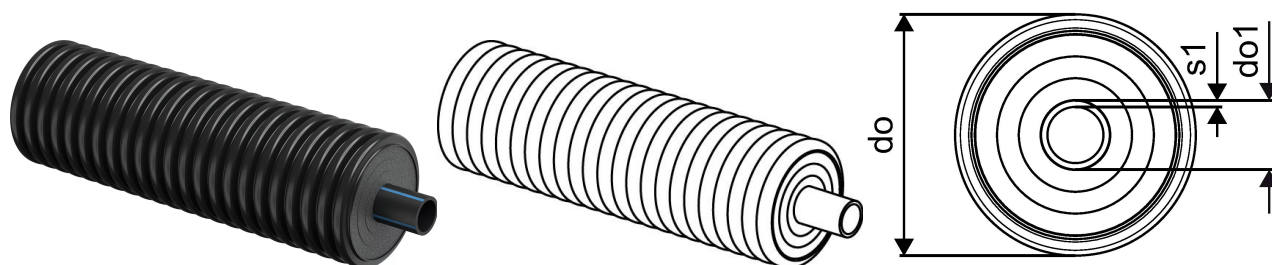

Measurements

Bending radius M	0,7
Outer Diameter_do	140
Outer Diameter_do1	63
Wall thickness_s1	5,8

Product code

Item no EAN	6414905485642
Item no GF	35001095726
Item no GTIN	06414905485642
Item no NRF	8361427

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,97
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905537921
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	394
Packaging Width PL1	1500

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com