
Product data sheet



GF Uponor RS adapter S-Press PLUS 25-RS2

1095819

- Made of tin-plated DR brass (lead-free)
- press without bevel

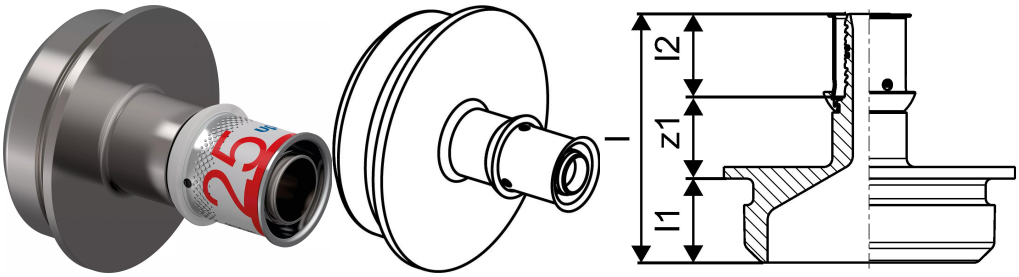

Application information GF Uponor RS adapter S-Press PLUS

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor RS adapter S-Press PLUS 25-RS2

1095819

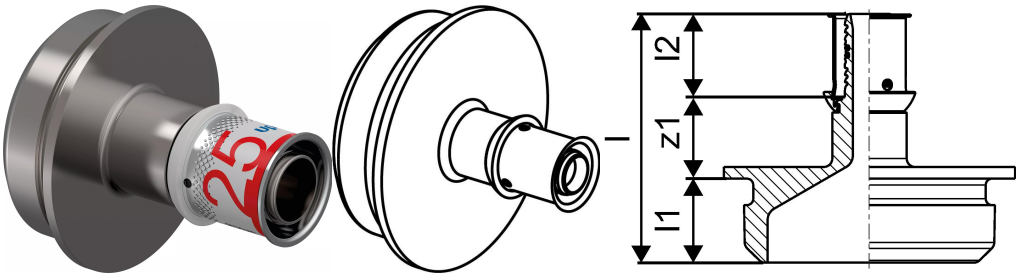

Product code

Item no EAN	6414905480128
Item no GF	35001095819
Item no GTIN	06414905480128
Item no LVI	1720818
Item no NRF	5071228
Item no RSK	1899575
Item no VVS	045450325

Dimensions

Item Unit Height	70
Item Unit Length	75
Item Unit Weight	0,36
Item Unit Width	70
Item_UOM	pce

Measurements

LENGTH_L	74,9
Length (l1)	20,1
Length (l2)	28,3
z1	26,5

Packaging

Packaging GTIN PL1	06414905481606
Packaging GTIN PL4	06414905555581
Packaging Height PL1	80
Packaging Height PL4	600
Packaging Length PL1	120
Packaging Length PL4	800

Packaging Quantity PL1	1
Packaging Quantity PL4	378
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00096
Packaging Volume PL4	0,576
Packaging Weight PL1	0,415
Packaging Weight PL4	176,87
Packaging Width PL1	100
Packaging Width PL4	1200

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+