


Uponor S-Press PLUS adapter PPM 16

1119005

- adapter Aqua PLUS

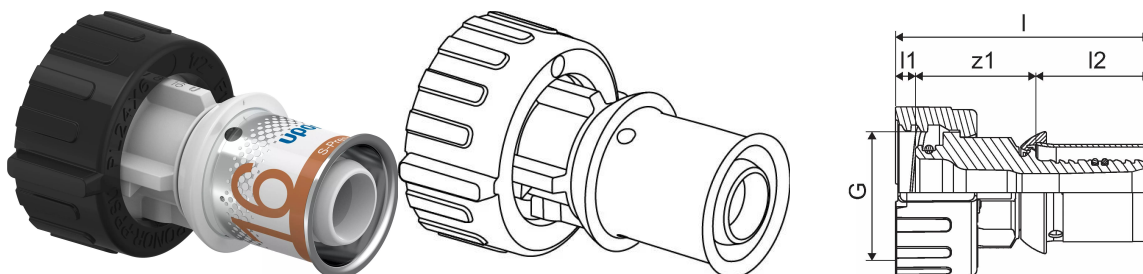

Application information Uponor S-Press PLUS adapter PPM

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS adapter PPM 16

1119005

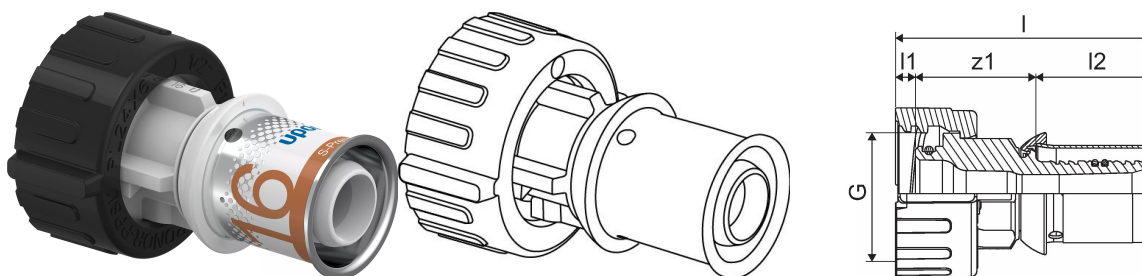

Measurements

Cylindric_thread_G PL24X6 1/2

LENGTH_L 45,7

Length (l1) 3,6

Length (l2) 20,5

z1 21,6

Product code

Item no EAN 6414905554522

Item no GF 35001119005

Item no GTIN 06414905554522

Item no LVI 1720843

Item no NRF 5110302

Item no RSK 2054923

Item no VVS 087608216

Dimensions

Item Unit Height 30

Item Unit Length 42

Item Unit Weight 0,018

Item Unit Width 35

Item_UOM pce

Packaging

Packaging GTIN PL1 06414905554539

Packaging GTIN PL3 06414905554546

Packaging GTIN PL4 06414905554553

Packaging Height PL1 30

Packaging Height PL3 95

Packaging Height PL4 806

Packaging Length PL1 45

Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	30
Packaging Quantity PL4	3360
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00004725
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,77376
Packaging Weight PL1	0,028
Packaging Weight PL3	0,94
Packaging Weight PL4	130,28
Packaging Width PL1	35
Packaging Width PL3	179
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com