


## Uponor Ecoflex VIP Aqua Pipe Twin 40x5,5-25x3,5/140

**1119055**

- Warm tap water
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- VIP + PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

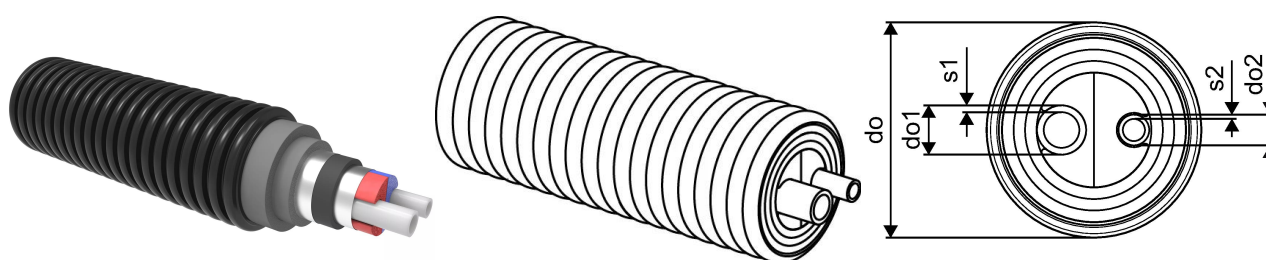

### Application information Uponor Ecoflex VIP Aqua Pipe Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approval should be checked by local responsible person

## Uponor Ecoflex VIP Aqua Pipe Twin 40x5,5-25x3,5/140

1119055

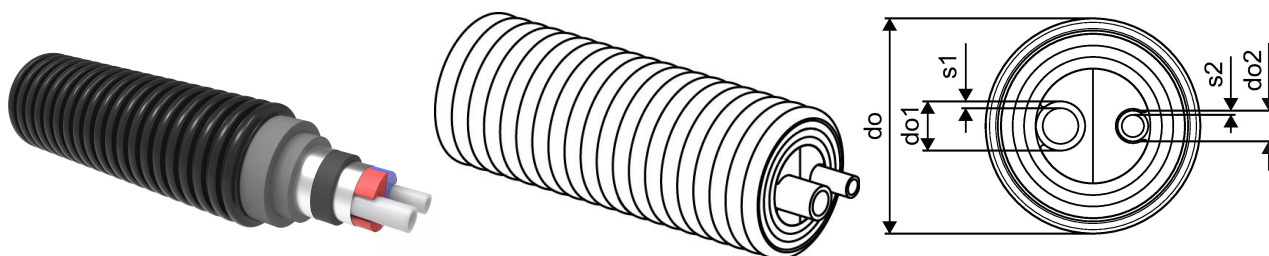

### Measurements

Bending radius M	0,9
Outer Diameter_do	140
Outer Diameter_do1	40
Outer Diameter_do2	25
Wall thickness_s1	5,5
Wall thickness_s2	3,5

### Product code

Item no EAN	6414905556373
Item no GF	35001119055
Item no GTIN	06414905556373
Item no LVI	3010301
Item no NRF	8360973
Item no RSK	2266381
Item no VVS	087364240

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	2,18
Item Unit Width	140
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905557943
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26

Packaging Weight PL1	436,1
Packaging Width PL1	1500

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)