
Product data sheet





GF Uponor S-Press PLUS sound + leak protect U 16-20

1121194

- Suitable for one Uponor S-Press PLUS U-tap elbows 16-Rp1/2"FT or 20-Rp1/2"FT
- Pins and screws M6 x 16 included
- Made of EPP
- Sound protection acc., VDI 4100
- Drainage function conform to DIN 18534

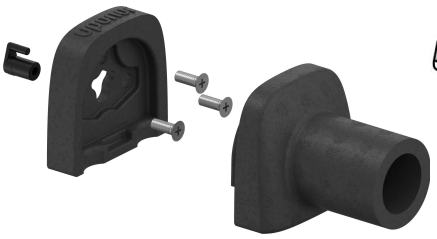

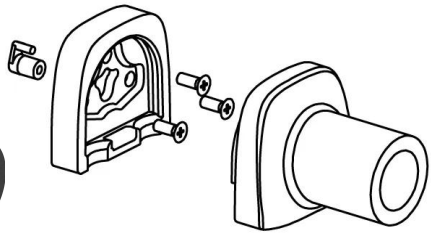



Application information GF Uponor S-Press PLUS sound + leak protect U

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS sound + leak protect U 16-20

1121194

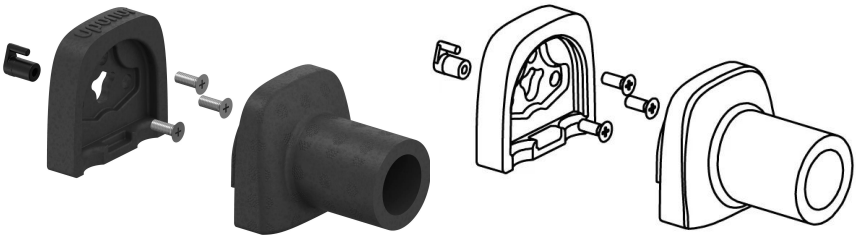



Measurements

Inner_diameter_di	32,5
Length (l1)	26
Outer Diameter_do	48,5
Z Measurement k	40
Z Measurement w	96,5
Z Measurement w1	17,5
z1	9,5

Product code

Item no EAN	6414905641536
Item no GF	35001121194
Item no GTIN	06414905641536

Dimensions

Item Unit Height	73.5
Item Unit Length	96.5
Item Unit Weight	0,031
Item Unit Width	79
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905662623
Packaging GTIN PL4	06414905663910
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	135
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	384
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001045305
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,033
Packaging Weight PL4	37,7
Packaging Width PL1	87
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+