
Product data sheet



GF Uponor Aqua Pipe white opaque 20x2,8mm 100m

1126787

- Material: PE-Xa
- Watermark approved
- Operating pressure 10 bar
- In coils

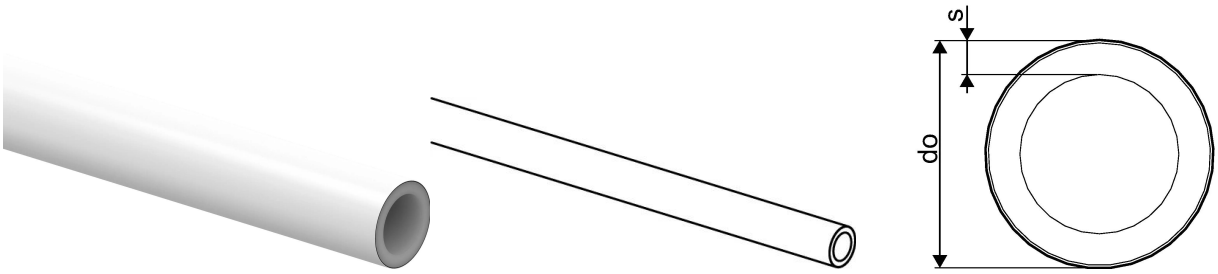

Application information GF Uponor Aqua Pipe white opaque

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe white opaque 20x2,8mm 100m

1126787

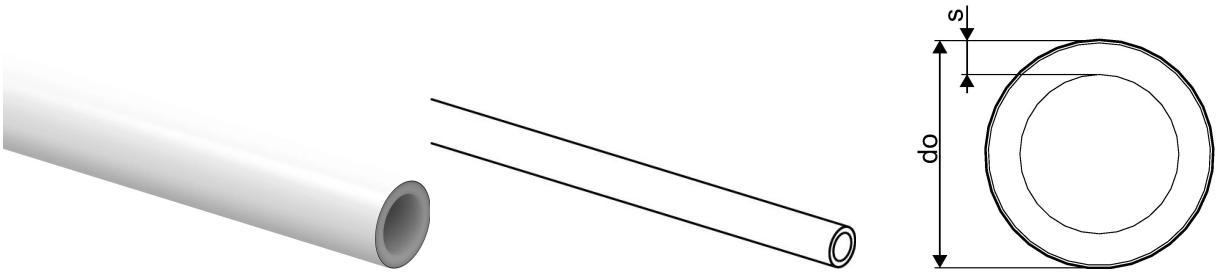

Product code

Item no EAN	6414905672592
Item no GF	35001126787
Item no GTIN	06414905672592

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,154
Item Unit Width	20
Item_UOM	m

Measurements

Outer Diameter_do	20
Wall thickness_s	2,8

Packaging

Packaging GTIN PL1	06414900480833
Packaging GTIN PL4	06414900438216
Packaging Height PL1	150
Packaging Height PL4	1640
Packaging Length PL1	760
Packaging Length PL4	760
Packaging Quantity PL1	100
Packaging Quantity PL4	1000
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,08664
Packaging Volume PL4	0,947264

Packaging Weight PL1	15,5
Packaging Weight PL4	164
Packaging Width PL1	760
Packaging Width PL4	760

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+