


Uponor Aqua pipe white opaque 25x3,5mm 100 m

1126788

- Material: PE-Xa
- Watermark approved
- Operating pressure 10 bar
- In coils

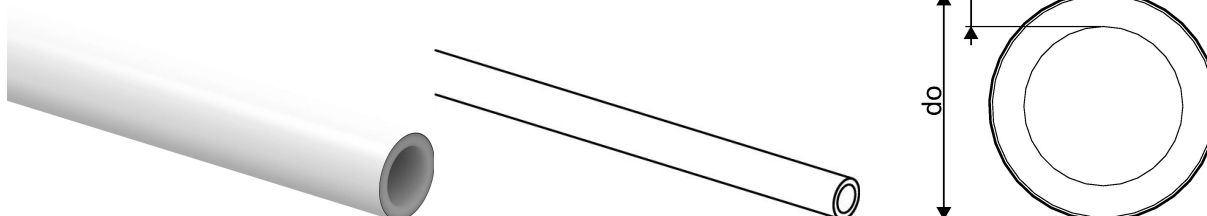

Application information Uponor Aqua pipe white opaque

Specification



- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua pipe white opaque 25x3,5mm 100 m

1126788

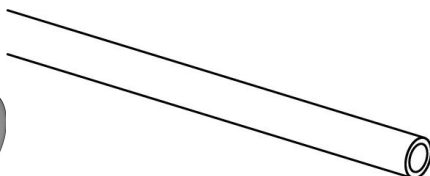

Product code

Item no EAN	6414905672608
Item no GF	35001126788
Item no GTIN	06414905672608

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,242
Item Unit Width	25
Item_UOM	m

Measurements

Outer Diameter_do	25
Wall thickness_s	3,5

Packaging

Packaging GTIN PL1	06414900480840
Packaging GTIN PL4	06414900438223
Packaging Height PL1	210
Packaging Height PL4	1610
Packaging Length PL1	760
Packaging Length PL4	760
Packaging Quantity PL1	100
Packaging Quantity PL4	700
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,121296
Packaging Volume PL4	0,929936
Packaging Weight PL1	24,4
Packaging Weight PL4	179

Packaging Width PL1	760
Packaging Width PL4	760

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com