


## Uponor Vario S manifold body FM 7xG3/4 Euro - G1

**1140883**

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps
- Without primary connection G1

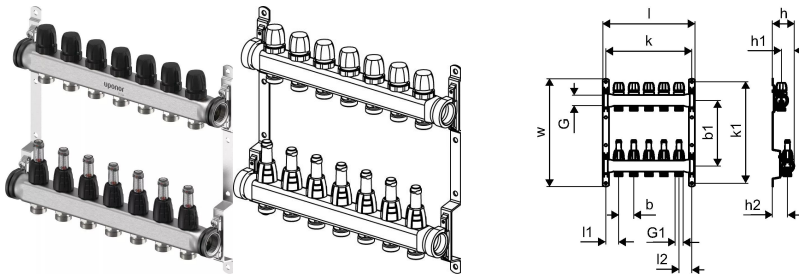

### Application information Uponor Vario S manifold body FM

#### Specification



- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor heating and cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold body FM 7xG3/4 Euro - G1

1140883

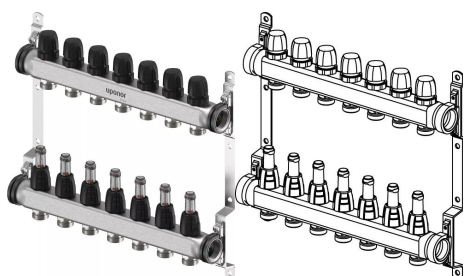

### Status

Item Available From date

2024-04-01

### Product code

Item no EAN

6414900440905

Item no GF

35001140883

Item no GTIN

06414900440905

Item no LVI

2022262

### Dimensions

Item Unit Height

40

Item Unit Length

350

Item Unit Weight

4,3

Item Unit Width

235

Item\_UOM

pce

### Measurements

LENGTH\_L

405

Length (l1)

50

Z Measurement b

50

Z Measurement b1

217

Z Measurement h

73

Z Measurement h1

30

Z Measurement h2

50

Z Measurement k

385

Z Measurement k1

336

Z Measurement w

357

### Packaging

Packaging GTIN PL1

06414900501071

Packaging GTIN PL4

06414900323130

Packaging Height PL1

47

Packaging Height PL4	996
Packaging Length PL1	617
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	54
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,009221682
Packaging Volume PL4	0,95616
Packaging Weight PL1	4,4
Packaging Weight PL4	263
Packaging Width PL1	318
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com