
Product data sheet



GF Uponor Aqua Pipe natural PN10 S 32x4,4 6m

1001206

- Material: PE-Xa
- Operating pressure 10 bar
- In bars

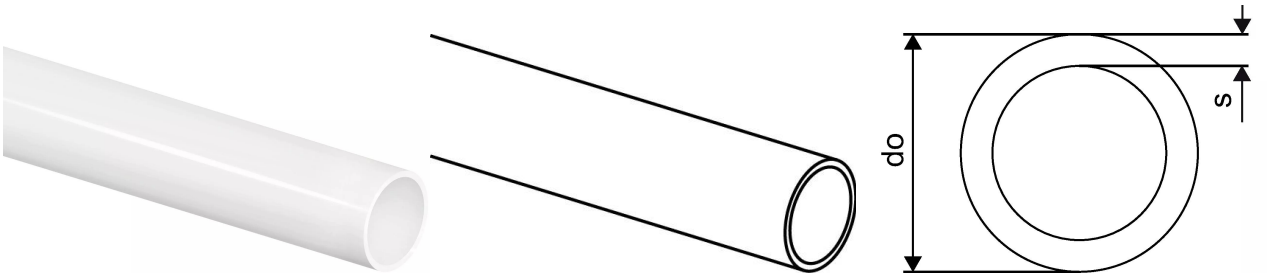

Application information GF Uponor Aqua Pipe natural PN10 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural PN10 S 32x4,4 6m

1001206

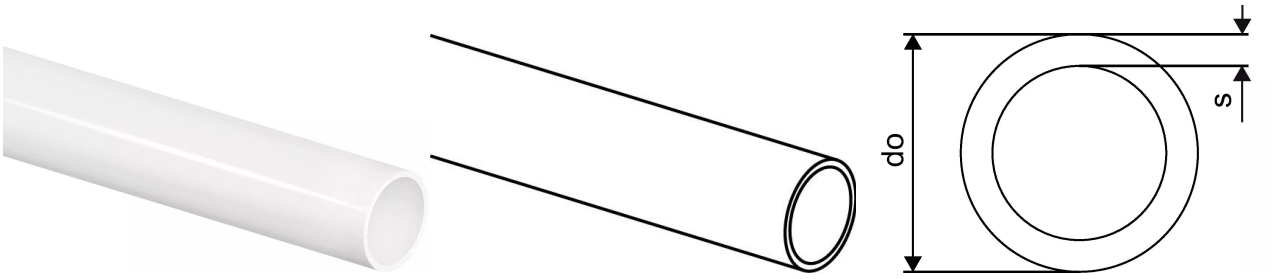

Product code

Item no EAN	7321500017996
Item no GF	35001001206
Item no GTIN	07321500017996
Item no LVI	2012590
Item no NOBB	47600420
Item no NRF	5110045
Item no RSK	2418096
Item no VVS	087310132

Dimensions

Item Unit Height	33
Item Unit Length	1000
Item Unit Weight	0,386
Item Unit Width	33
Item_UOM	m

Measurements

Outer Diameter_do	32
Wall thickness_s	4,4

Packaging

Packaging GTIN PL1	06414900622554
Packaging GTIN PL2	06414900622561
Packaging GTIN PL4	06414905250745
Packaging Height PL1	33
Packaging Height PL2	33
Packaging Height PL4	700
Packaging Length PL1	6000

Packaging Length PL2	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL2	12
Packaging Quantity PL4	1080
Packaging Type PL1	BAR
Packaging Type PL2	Bag
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,006534
Packaging Volume PL2	0,013068
Packaging Volume PL4	2,7755
Packaging Weight PL1	2,316
Packaging Weight PL2	4,7
Packaging Weight PL4	424,6
Packaging Width PL1	33
Packaging Width PL2	66
Packaging Width PL4	650

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+