


GF Uponor Ecoflex Aqua Pipe Twin 50x6,9-40x5,5/200

1044016

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

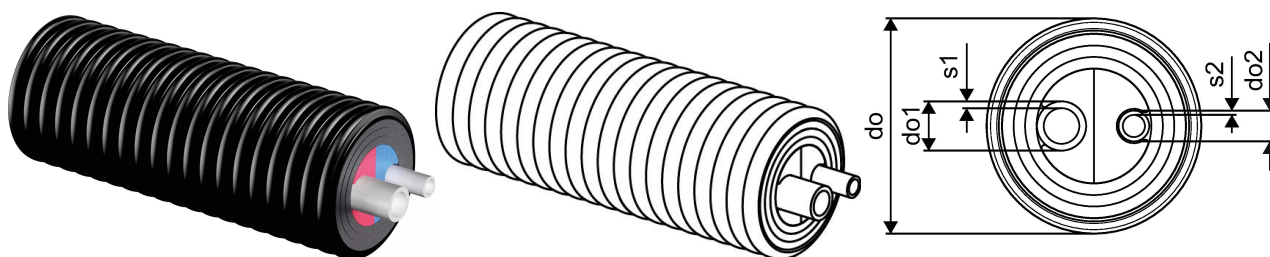

Application information GF Uponor Ecoflex Aqua Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

GF Uponor Ecoflex Aqua Pipe Twin 50x6,9-40x5,5/200

1044016

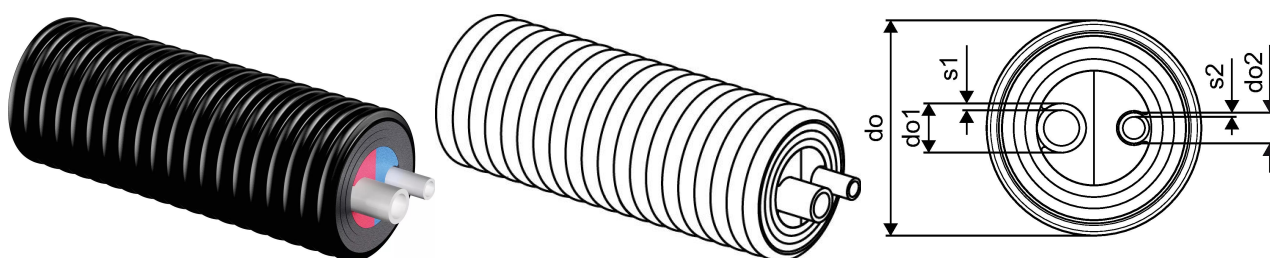**Measurements**

Bending radius M	1
------------------	---

Outer Diameter_do	200
-------------------	-----

Outer Diameter_do1	50
--------------------	----

Outer Diameter_do2	40
--------------------	----

Wall thickness_s1	6,9
-------------------	-----

Wall thickness_s2	5,5
-------------------	-----

Product code

Item no EAN	6414905212811
-------------	---------------

Item no GF	35001044016
------------	-------------

Item no GTIN	06414905212811
--------------	----------------

Item no LVI	3010156
-------------	---------

Item no VVS	087363350
-------------	-----------

Dimensions

Item Unit Height	200
------------------	-----

Item Unit Length	1000
------------------	------

Item Unit Weight	3,5
------------------	-----

Item Unit Width	200
-----------------	-----

Item_UOM	m
----------	---

Packaging

Packaging GTIN PL1	06414905458981
--------------------	----------------

Packaging Height PL1	2400
----------------------	------

Packaging Length PL1	1400
----------------------	------

Packaging Quantity PL1	100
------------------------	-----

Packaging Type PL1	Coil
--------------------	------

Packaging Volume PL1	8,064
----------------------	-------

Packaging Weight PL1	350
----------------------	-----

Packaging Width PL1	2400
---------------------	------

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com