


## Uponor Smatrix Base wallframe T-141 RAL9016

**1122237**

- Wallframe for Sensor RH Style T-141 1087812
- Wallframe for Thermostat T-144 1086973
- Color: white RAL9016

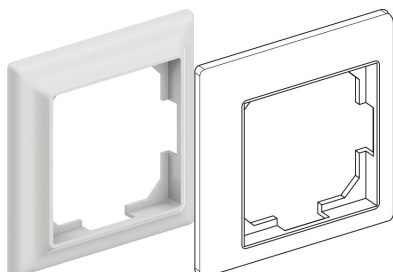

### Application information Uponor Smatrix Base wallframe T-141

#### Specification

- up to 4 controller in one system
- operating voltage: 230V
- autobalancing optimises energy use and comfort
- electric control
- supports up to 6 room thermostats and 8 actuators (24V) per controller
- pump and boiler relays
- valve and pump exercise
- relative humidity control
- different wiring options (daisy chain / star)
- 4-wire Bus installation
- communication protocol: RS485 serial bus
- max. power input per actuator: 24VAC / 0.2A (0.4A peak)

#### Smatrix Base Pulse:

- local access (Wi-Fi) or remote access (internet connection required) via Uponor Smatrix Pulse App (with R-208)
- temporary wi-fi access point for direct access (if local wi-fi is not available) (with R-208)
- smart home ecosystem integration (Amazon Alexa, Google Home) (with R-208)
- multi-home control (with R-208)
- third-party access for remote support (user allowance required) (with R-208)
- history trend analysis via Uponor Smatrix Pulse app (with R-208)
- timer programming (with R-208)
- comfort settings (with R-208)
- supply diagnostics (with R-208)

#### Application


- wired room temperature control for radiant heating and cooling
- set point range: +5°C ... +35°C

#### Certification

- CE / EAC

## Uponor Smatrix Base wallframe T-141 RAL9016

1122237

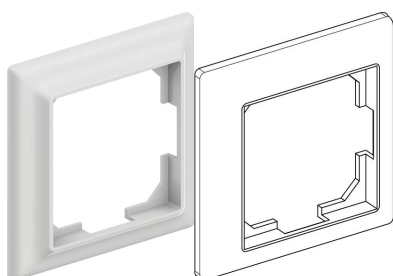**Product code**

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905665136  |
| Item no GF   | 35001122237    |
| Item no GTIN | 06414905665136 |
| Item no LVI  | 2025251        |
| Item no RSK  | 2989146        |
| Item no VVS  | 466258060      |

**Dimensions**

|                  |       |
|------------------|-------|
| Item Unit Height | 10.6  |
| Item Unit Length | 81.5  |
| Item Unit Weight | 0,009 |
| Item Unit Width  | 81.5  |
| Item_UOM         | pce   |

**Measurements**

|                 |      |
|-----------------|------|
| LENGTH_L        | 81,5 |
| Z Measurement h | 10,6 |
| Z Measurement w | 81,5 |

**Packaging**

|                        |                |
|------------------------|----------------|
| Packaging GTIN PL1     | 06414905679447 |
| Packaging GTIN PL2     | 06414900038928 |
| Packaging Height PL1   | 82.5           |
| Packaging Height PL2   | 125            |
| Packaging Length PL1   | 82.5           |
| Packaging Length PL2   | 300            |
| Packaging Quantity PL1 | 1              |
| Packaging Quantity PL2 | 20             |
| Packaging Type PL1     | Plastic_Bag    |
| Packaging Type PL2     | Medium_Box     |

|                      |             |
|----------------------|-------------|
| Packaging Volume PL1 | 0,000081675 |
| Packaging Volume PL2 | 0,0075      |
| Packaging Weight PL1 | 0,01        |
| Packaging Weight PL2 | 0,5         |
| Packaging Width PL1  | 12          |
| Packaging Width PL2  | 200         |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com